


STAINLESS STEEL CHAIN



F TYPE

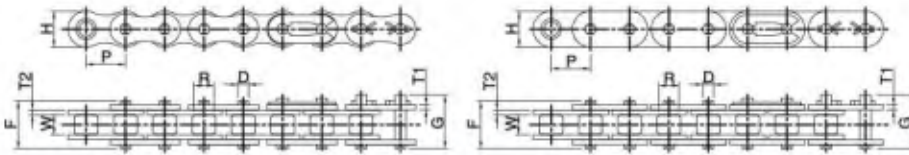

CHAIN NO.	Pitch		Width	Roller	Plate		Pin			Allowable Load kgf(max)	Approx Weight kg/m	
	P		W	Dia	Height	Thickness		Dia	Length			
	inch	mm	(min)	R(max)	H(max)	T1	T2	D(max)	F(max)			G(max)
* 25SS	1/4"	6.35	3.10	3.30	6.02	0.75	0.75	2.31	9.1	11.6	12	0.13
* 35SS	3/8"	9.525	4.68	5.08	9.05	1.25	1.25	3.60	13.2	16.5	27	0.34
40SS	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.98	17.8	21.7	45	0.61
50SS	5/8"	15.875	9.40	10.16	15.09	2.00	2.00	5.09	21.8	25.9	70	1.03
60SS	3/4"	19.05	12.57	11.91	18.10	2.40	2.40	5.96	26.9	31.5	105	1.48
80SS	1"	25.40	15.75	15.88	24.13	3.20	3.20	7.94	33.5	38.9	180	2.58
100SS	1-1/4"	31.75	18.90	19.05	30.17	4.00	4.00	9.54	41.1	47.2	260	3.86
120SS	1-1/2"	38.10	25.22	22.23	36.20	4.80	4.80	11.11	50.8	57.4	390	5.70
C2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	45	0.50
C2042SS	1"	25.40	7.85	15.88	12.0	1.50	1.50	3.98	17.8	21.7	45	0.84
A2040SS	1"	25.40	7.85	7.92	12.0	1.50	1.50	3.98	17.8	21.7	45	0.41
C2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	70	0.80
C2052SS	1-1/4"	31.75	9.40	19.05	15.0	2.00	2.00	5.09	21.8	25.9	70	1.26
A2050SS	1-1/4"	31.75	9.40	10.16	15.0	2.00	2.00	5.09	21.8	25.9	70	0.65
C2060SS	1-1/2"	38.10	12.57	11.91	18.0	2.40	2.40	5.96	26.9	31.5	105	1.10
C2060HSS	1-1/2"	38.10	12.57	11.91	18.0	3.20	3.20	5.96	30.2	34.8	105	1.37
C2062HSS	1-1/2"	38.10	12.57	22.23	18.0	3.20	3.20	5.96	30.2	34.8	105	2.07
C2080HSS	2"	50.80	15.75	15.88	24.1	4.00	4.00	7.94	37.4	42.8	180	2.38
C2082HSS	2"	50.80	15.75	28.58	24.1	4.00	4.00	7.94	37.4	42.8	180	3.39
05BSS	0.315"	8.00	3.00	5.00	7.11	0.75	0.75	2.31	8.6	11.7	11	0.15
06BSS	0.375"	9.525	5.72	6.35	8.26	1.00	1.30	3.28	13.5	16.8	26	0.39
08BSS	0.5"	12.70	7.75	8.51	11.81	1.50	1.50	4.45	17.0	20.9	50	0.66
10BSS	0.625"	15.875	9.65	10.16	14.73	1.65	1.65	5.08	19.6	23.7	67	0.92
12BSS	0.75"	19.05	11.68	12.07	16.13	1.80	1.80	5.72	22.7	27.3	90	1.26
16BSS	1"	25.40	17.02	15.88	21.08	3.20	4.00	8.28	36.1	41.5	210	2.74
40FSS	1/2"	12.70	7.85	7.92	12.07	1.50	1.50	3.98	17.8	21.7	45	0.68
50FSS	5/8"	15.875	9.40	10.16	15.09	2.00	2.00	5.09	21.8	25.9	70	1.16
60FSS	3/4"	19.05	12.57	11.91	18.10	2.40	2.40	5.96	26.9	31.5	105	1.69

*Rollerless chain, R indicates bushing diameter.