


BEARINGS


FLANGED BEARINGS

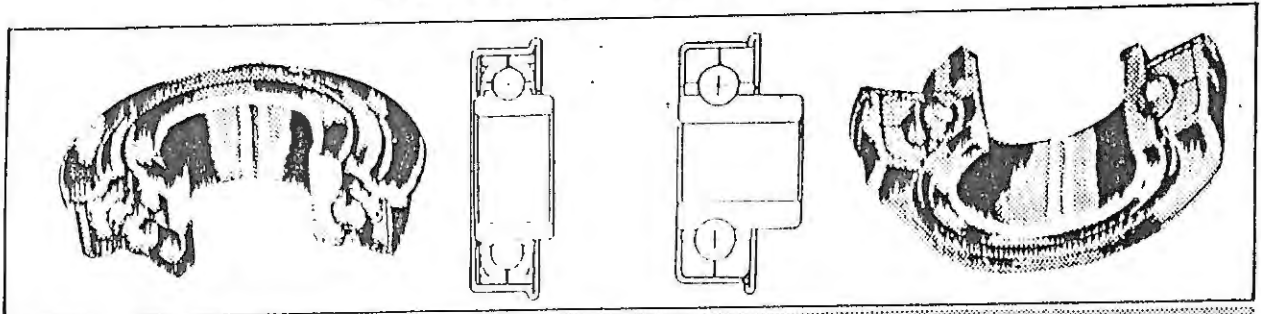

FLANGED BEARINGS FOR IMPLEMENT WHEELS

BEARING No.	BORE SIZE	OUTSIDE DIMENSION WITHOUT FLANGE	OUTSIDE DIMENSION WITH FLANGE
ASF107-3	1/2"	1-3/8"	1-1/2"
ASF107-5	5/8"	1-3/8"	1-1/2"
ASF107-6	3/4"	1-3/8"	1-1/2"
ASF100-2	1"	2"	2-1/8"



SPECIAL AGRICULTURAL BEARINGS

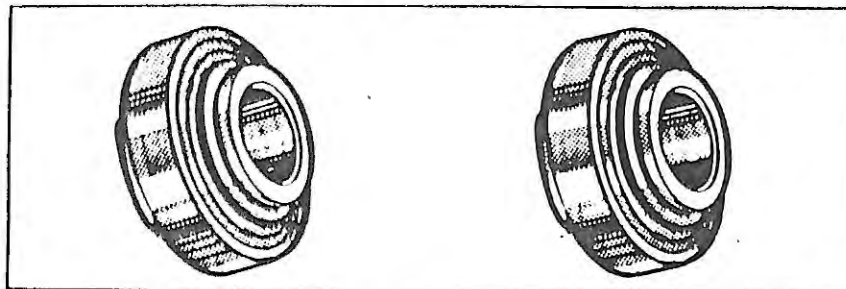

BEARING NO.	APPLICATION
UXC10-31	Versatile Wheel Bearing Idler Sprocket & Pulleys Kirshman Drill Bearing Numerous AG Applications
Z03KRR2	
SLV6204-2RS	
Z9504B	

Z9504B - 3/4" ID 1-3/4 (45mm) OD 15mm Wide



Flanged Disc Units

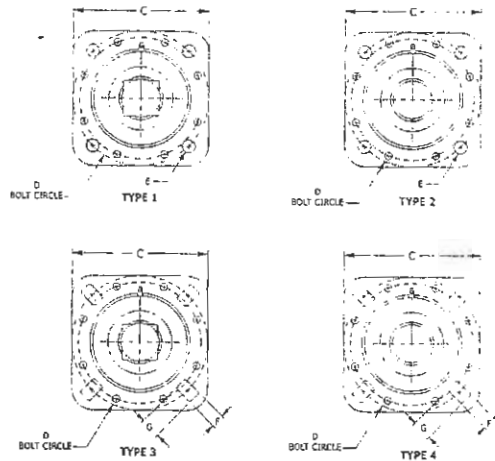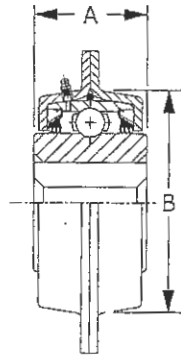

Part Number	Quantity	Disc Size	Disc Thickness	Disc Hole Size	Disc Hole Spacing	Disc Hole Diameter	Disc Hole Diameter	Disc Hole Diameter	Disc Hole Diameter
ST491	2	44.83RD	42.80		127.00	127.00	13.50	—	—
ST491A	2	45.00RD	42.80		127.00	127.00	13.50	—	—
ST491AS	4	1 3/4RD	1.687	4.000	5.000	5.000	—	0.531	0.687
ST491B	4	38.86RD	42.800		5.000	5.000	—	0.531	0.687
ST491SQ29.97	1	29.97SQ	42.80		5.000	5.000	0.531		
ST491SQ30.5	1	30.50SQ	42.80		5.000	5.000	0.531	—	—
ST491SQ32.77	1	32.77SQ	42.80		5.000	5.000	0.531	—	—
XF013	2	45.00RD	42.80		175	175	0.531	—	—
XF009	2	45.40RD	42.80		127.00	127.00	13.50	—	—
ST740	4	55.575RD	55.56		5.500	5.500	—	0.531	0.687
ST740SQ36	1	36.00SQ	55.56		5.500	5.500	0.531	—	—
ST740SQ39	1	39.25SQ	55.56		5.500	5.500	0.531	—	—
ST740SQ41	1	41.00SQ	55.56		5.500	5.500	0.531	—	—
FD209-1 1/8SQ	3	1 1/8SQ	1.687	4.000	5.000	5.000		0.531	0.687
FD209-1 1/4SQ	3	1 1/4SQ	1.687	4.000	5.000	5.000	—	0.531	0.687
FD209-1 1/4SQ	1	32.77SQ	42.8	98.00	127.00	127.00	0.531	—	—
FD211-1 1/2SQ	3	1 1/2SQ	2.000	4.500	5.500	5.500		0.531	0.687
FD211-1 3/4RD	2	1 3/4RD	2.187	4.500	5.500	5.500	0.531		
FD211-1 3/4HX		1 3/4HX	2.187	4.500	5.500	5.500	0.531		
FD211-1 15/16RD	2	1 15/16RD	2.187	4.500	5.500	5.500	0.531		
FD211-1 15/16RDC		1 15/16RD	2.125	4.500	5.500	5.500	0.531		
FD211-2 3/16RD	2	2 3/16RD	2.187	4.500	5.500	5.500	0.531	—	—



*Can be used with locking cam RD-round SQ-square HX-hex

Round Bore Non-Relubricable

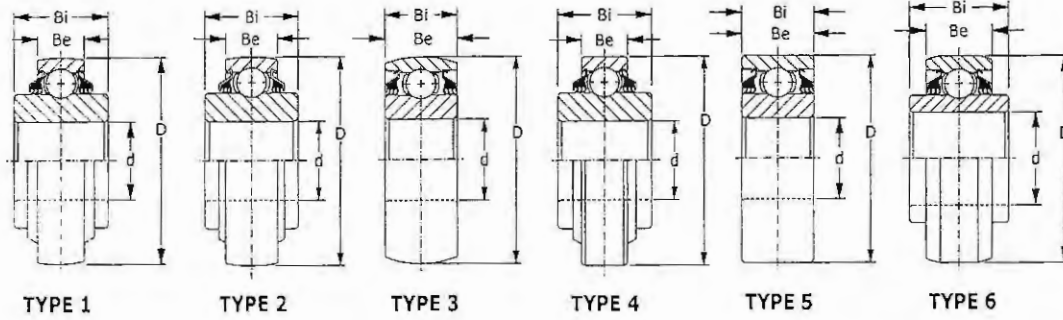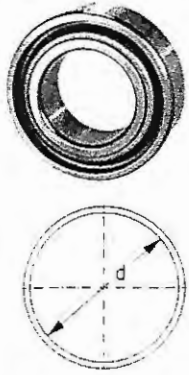



NBR Unit Number	Type	1	2	3	4	5	6	7	8	9	10	11
W208PPB2	1	1.5005	.005	3.1496	.005	.7090	.0050	1.6880	.0050	7,340	3,650	1.59
W208PPB7	2	1.1880	.0005	3.1496	.0005	.7090	.0050	1.1880	.0050	7,340	3,650	1.41
W208PP10	4	1.5005	.0005	3.1496	.0005	.8270	.0050	1.6880	.0050	7,340	3,650	1.50
W208PPB10	1	1.5005	.0005	3.1496	.0005	.8270	.0050	1.6880	.0050	7,340	3,650	1.59
W208PPB23	2	1.5005	.0005	3.1496	.0005	1.1880	.0050	1.6880	.0050	7,340	3,650	1.50
W209PPB2	3	1.7717	.0005	3.3460	.0006	1.1880	.0050	1.1880	.0050	7,350	4,150	1.45
W209PPB4	3	1.5350	.0100	3.3460	.0060	1.1880	.0050	1.1880	.0050	7,350	4,150	1.65
W210PP2	5	1.9380	.0005	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.69
W210PPB2	3	1.9380	.0005	3.5430	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.56
W210PPB5	3	1.7850	.0100	3.5430	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.75
W210PPB8	5	1.5300	.0100	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.97
W210PPB9	2	1.9448	.0070	3.5433	.0006	.9055	.0050	1.4382	.0050	7,880	4,650	1.91
W211PP2	5	2.1880	.0006	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.33
W211PPB2	3	2.1880	.0006	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	3.00
W211PPB4	6	2.1880	.0006	3.9370	.0006	1.3120	.0060	2.1870	.0060	9,740	5,850	3.63
W214PP2	5	2.7559	.0006	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	4.19
W214PPB2	3	2.7559	.0006	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	3.96
W214PPB9	3	2.7660	.0010	4.9213	.0008	1.1020	.0060	1.7500	.0060	14,000	8,800	3.96

Round Bore Relubricable

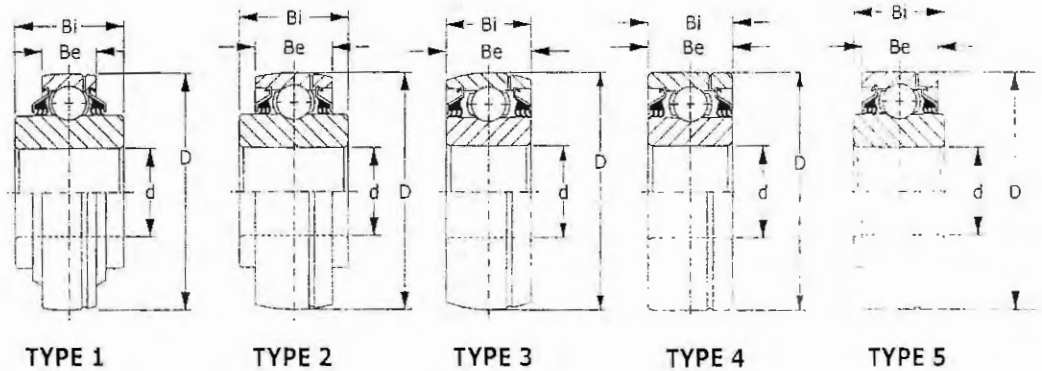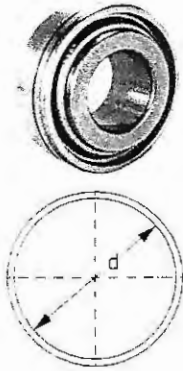



NBR U.S. Imperial	Type	B	b	B _i	B _e	B _i	B _e	B _i	B _e	Load Ratings		Wt. Lbs.
										Dynamic	Static	
GW209PPB2	3	1.7717	.0005	3.3465	.0006	1.1880	.0050	1.1880	.0050	7,350	4,150	1.44
GW209PPB4	3	1.5350	.0100	3.3465	.0006	1.1880	.0050	1.1880	.0050	7,350	4,150	1.65
GW209PPB11	1	1.7810	.0100	3.3465	.0006	.8660	.0050	1.4380	.0050	7,350	4,150	1.37
GW210PPB2	3	1.9380	.0005	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.50
GW210PPB5	3	1.7850	.0100	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.80
GW210PP9	5	1.9450	.0070	3.5433	.0006	.9060	.0050	1.4380	.0050	7,880	4,650	1.75
GW211PP2	4	2.1880	.0006	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	3.00
GW211PPB2	3	2.1880	.0006	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.62
GW211PPB8	1	2.1880	.0006	3.9370	.0006	.9840	.0060	1.3120	.0060	9,740	5,850	1.85
GW211PPB9	1	2.1950	.0070	3.9370	.0006	.9840	.0060	1.5620	.0060	9,740	5,850	2.02
GW211PPB10	3	1.9380	.0006	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.26
GW211PPB13	1	1.7850	.0100	3.9370	.0006	.9840	.0060	1.3120	.0060	9,740	5,850	2.02
GW211PPB14	1	2.0150	.0100	3.9370	.0006	.9840	.0060	1.3120	.0060	9,740	5,850	2.00
GW211PP25	5	1.7800	.0050	3.9370	.0006	1.3120	.0060	1.7500	.0060	9,740	5,850	2.44
GW214PP2	4	2.7559	.0006	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	4.19
GW214PPB2	3	2.7559	.0006	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	3.96
GW214PPB3	3	1.9380	.0006	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	4.24
GW214PPB5	2	2.7559	.0006	4.9213	.0008	1.5620	.0060	2.4380	.0060	14,000	8,800	4.75
GW214PPB6	1	2.6881	.0006	4.9213	.0008	1.1024	.0060	2.6875	.0060	14,000	8,800	5.14

Square Bore Non - Relubricable

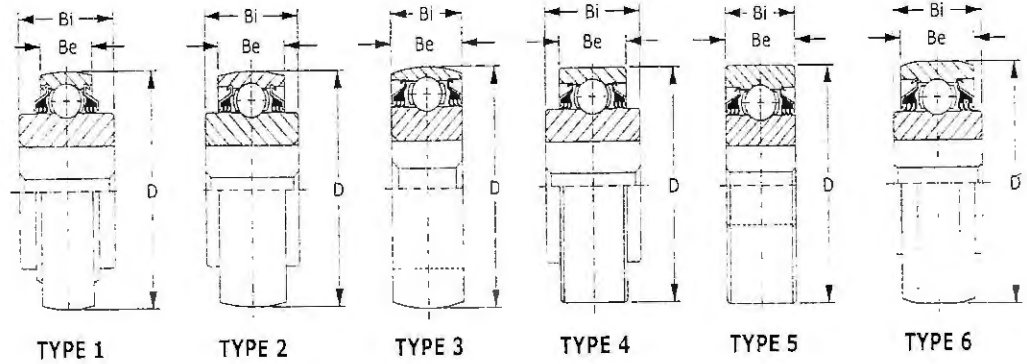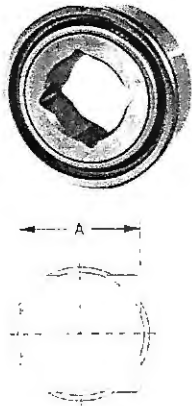


NBR Unit Number	Type	Bore Size	A	Bi	Be	Ball Diameter	Bore Diameter	Bore Width	Bore Depth	Ball Retention		V ₁₀	
										Dynamic	Static		
W208PP5	4	1 1/8	1.1800	±.005	3.1496	.0005	.7090	.0050	1.4380	.0050	7,340	3,650	1.50
W208PPB5	1	1 1/8	1.1800	±.005	3.1496	.0005	.7090	.0050	1.4380	.0050	7,340	3,650	1.47
W208PP6	4	1	1.0300	±.005	3.1496	.0005	.7090	.0050	1.4380	.0050	7,340	3,650	1.62
W208PPB6	1	1	1.0300	±.005	3.1496	.0005	.7090	.0050	1.4380	.0050	7,340	3,650	1.59
W208PP8	4	1 1/8	1.1800	±.005	3.1496	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	1.66
W208PPB8	2	1 1/8	1.1800	±.005	3.1496	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	1.66
W208PPB9	2	1	1.0300	±.005	3.1496	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	1.74
W208PPB11	6	7/8	.9050	±.005	3.3760	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	2.05
W208PPB12	6	1 1/8	1.1800	±.005	3.3760	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	1.62
W208PPB13	1	7/8	.9050	±.005	3.1496	.0005	.7090	.0050	1.4380	.0050	7,340	3,650	1.62
W209PPB5	2	1 1/4	1.2900	±.005	3.3465	.0005	1.1880	.0050	1.4380	.0050	7,350	4,150	1.75
W209PPB7	6	1 1/4	1.2900	±.005	3.3760	.0005	1.1880	.0050	1.4375	.0050	7,350	4,150	1.80
W210PP4	5	1 1/8	1.1800	±.005	3.5433	.0005	1.1880	.0050	1.1880	.0050	7,880	4,650	1.92
W210PPB4	3	1 1/8	1.1800	±.005	3.5433	.0005	1.1880	.0050	1.1880	.0050	7,880	4,650	2.11
W210PPB6	2	1 1/8	1.1800	±.005	3.5433	.0005	1.1880	.0050	1.4380	.0050	7,880	4,650	2.11
W211PP3	5	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.79
W211PPB3	3	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.66
W211PP5	4	1 1/2	1.5311	±.005	4.0000	.0006	1.4380	.0060	1.7500	.0060	9,740	5,850	3.38
W211PPB6	6	1 1/2	1.5311	±.005	4.0770	.0006	1.4380	.0060	1.7500	.0060	9,740	5,850	4.05


Square Bore Relubricable

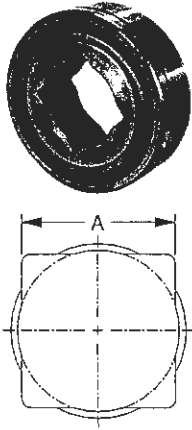


TYPE 1




TYPE 2



TYPE 3





TYPE 4




TYPE 5

Part Number	Bore Size	Bore Type	Bore Dia.	Bore Tolerance	Bore Dia. (mm)	Bore Tolerance (mm)	Bore Dia. (mm)	Bore Tolerance (mm)	Bore Dia. (mm)	Bore Tolerance (mm)	Load Ratings		CR
											Dynamic	Static	
GW208PPB5	1	1 1/8	1.1800	±.005	3.1496	.0005	.8270	.0050	1.4380	.0050	7,340	3,650	1.47
GW208PPB6	1	1	1.0300	±.005	3.1496	.0005	.8270	.0050	1.4380	.0050	7,340	3,650	1.75
GW208PPB8	2	1 1/8	1.1800	±.005	3.1496	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	1.75
GW208PPB7	4	1 1/8	1.1800	±.005	3.3755	.0005	1.1880	.0500	1.4380	.0500	7,340	3,650	2.04
GW208PPB17	2	1 1/8	1.1800	±.005	3.3755	.0005	1.1880	.0050	1.4380	.0050	7,340	3,650	2.04
GW209PPB5	2	1 1/4	1.2900	±.005	3.3465	.0006	1.1880	.0050	1.4380	.0050	7,350	4,150	1.75
GW209PPB8	1	1 1/4	1.2900	±.005	3.3465	.0006	.8660	.0050	1.4380	.0050	7,350	4,150	1.65
GW210PP4	5	1 1/8	1.1800	±.005	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	2.31
GW210PPB4	3	1 1/8	1.1800	±.005	3.5433	.0006	1.1880	.0050	1.1880	.0050	7,880	4,650	1.75
GW211PPB3	5	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.79
GW211PPB8	3	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.3120	.0060	9,740	5,850	2.66
GW211PP5	4	1 1/2	1.5311	±.005	4.0000	.0006	1.4380	.0060	1.7500	.0060	9,740	5,850	2.69
GW211PP17	4	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.7500	.0060	9,740	5,850	2.62
GW211PPB17	1	1 1/2	1.5311	±.005	3.9370	.0006	1.3120	.0060	1.7500	.0060	9,740	5,850	2.55
GW212PP50	4	1 3/4	1.7400	±.005	4.3307	.0008	1.5060	.0059	2.0000	.0059	11,790	8,110	4.35
GW214PPB4	3	2	2.0551	±.005	4.9213	.0008	1.5620	.0060	1.5620	.0060	14,000	8,800	4.75
GW216PP2	4	2 1/4	2.3150	±.005	5.5118	.0008	1.1810	.0060	2.5000	.0060	16,280	10,400	6.32


Hex Bore Series

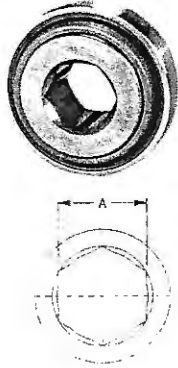


TYPE 1



TYPE 2



TYPE 3



TYPE 4

NBR Part Number	Type	Bore Size	Dimensions							Slinger			
			W	W ₁	W ₂	W ₃	W ₄	W ₅	W ₆	W ₇	W ₈	W ₉	
202KRR3	1	9/16"	.5630	.0050	1.3780	.0005	.4330	.0050	.5120	.0050	2.160	1.000	.12
204KPP2	3	11/16"	.6950	.0050	1.8504	.0005	.5510	.0050	.8250	.0050	2.900	1.000	.34
204KRR2	1	11/16"	.6950	.0050	1.8504	.0005	.5510	.0050	.8250	.0050	2.900	1.410	.32
204KRRB2	2	11/16"	.6950	.0050	1.8504	.0005	.5510	.0050	.8250	.0050	2.900	1.410	.32
205KPP2	3	7/8"	.8760	.0050	2.0472	.0005	.5910	.0050	1.0000	.0050	3.150	1.610	.47
205KRR2	1	7/8"	.8760	.0050	2.0472	.0005	.5910	.0050	1.0000	.0050	3.150	1.610	.44
205KPPB2	4	7/8"	.8760	.0050	2.0472	.0005	.5910	.0050	1.0000	.0050	3.150	1.610	.47
205KRRB2	2	7/8"	.8760	.0050	2.0472	.0005	.5910	.0050	1.0000	.0050	3.150	1.610	.44
206KPP4***	3	1"	1.0010	.0050	2.4409	.0005	.6299	.0047	1.0600	.0047	4.370	2.320	.47
G206KPPB4*	4	1"	1.0010	.0050	2.4409	.0005	.7087	.0047	.9449	.0047	4.370	2.320	.47
206KRR6	1	1"	1.0010	.0050	2.4409	.0005	.6300	.0050	.9450	.0050	4.370	2.320	.75
206KRRB6	2	1"	1.0010	.0050	2.4409	.0005	.6300	.0050	.9450	.0050	4.370	2.320	.75
G207KPPB2*	4	1 1/8"	1.1260	.0050	2.8346	.0005	.7480	.0050	1.4840	.0050	5.770	3.150	1.10
207KRRB9	2	1 1/8"	1.1260	.0050	2.8346	.0005	.6690	.0050	1.4840	.0050	5.770	3.150	1.00
207KRRB12	2	1 1/8"	1.1260	.0050	2.8346	.0005	.6690	.0050	.9840	.0050	5.770	3.150	.87
GW208PPB22*	4	1 1/4"	1.2510	.0050	3.1496	.0005	.8270	.0050	1.4380	.0050	7.340	3.650	1.50
W208KRRB6	2	1 3/8"	1.3760	.0050	3.1496	.0005	.8270	.0050	1.4380	.0050	7.340	3.650	1.31
W208PPB16	4	1 1/4"	1.2510	.0050	3.1496	.0005	.7090	.0050	1.4380	.0050	7.340	3.650	1.45
W208PP21	3	1 1/4"	1.2510	.0050	3.1496	.0005	.7090	.0050	1.4380	.0050	7.340	3.650	1.45
G209KPPB2*	4	1 1/2"	1.5010	.0050	3.3465	.0006	.7480	.0050	1.1810	.0050	7.350	4.150	1.26
G5209KYYB2**		1 1/2"	1.5010	.0050	3.3465	.0006	1.1811	.0050	1.2992	.0050	9.330	7.580	1.27
209KRRB2	2	1 1/2"	1.5010	.0050	3.3465	.0006	.7480	.0050	1.1810	.0050	7.350	4.150	1.27
210PPB20	3	1 1/4"	1.2550	.0050	3.5433	.0006	0.8661	.0050	1.4350	.0050	9.070	5.675	2.00
210PP20	3	1 1/4"	1.2550	.0050	3.5433	.0006	0.8661	.0050	1.435	.0050	9.070	5.675	2.05
G210KPPB2*	4	1 1/2"	1.5010	.0050	3.5433	0.115	0.8661	.0050	1.1811	.0050	7.780	4.650	
GC211-32-NLC*	3	1 3/4"	1.7510	.0050	3.9370	.0006	.9840	.0060	2.2500	.0060	9.740	5.850	3.35

* Relubricable
 ** Double row bearing with double lip shroud seals.
 *** Nylon slinger included

SPECIAL AGRICULTURAL BEARINGS

SPECIAL BEARINGS, CONTINUED

Shaft Size	O.D.	Inner Ring Width	Outer Ring Width	BCA # Part No.
.7500	2.0472	.8280	.5906	205RRAN
.7500	2.3770	.3750	.6250	UA6228Z
.7505	1.7805	.6100	.6100	204BBAR
.7505	1.7805	.6100	.6100	204BAR
.7510	2.0472	.6400	.7000	205RHN
.7510	2.0472	.8280	.5906	205RVA
.7510	2.0472	.9210	.7000	205TNJ
.7510	2.0472	1.3750	.5906	205TTB
.7515	1.8504	1.3440	.5512	204GGB
.7540	2.0470	.5906	.7160	205TNK
.7540	2.4409	.9449	.6299	206GGH
.7550	1.7805	.6100	.6100	204BBA4
.7874	1.8504	.5512	.5512	S204FF
.8750	1.8750	.5000	.5000	R14CC
.8750	1.8750	.5000	.5000	R14SS
.9425	2.0472	1.3750	.5906	205TTH
.9842	2.0472	.6693	.6693	S305FF
.9843	2.0472	.5906	.5906	205K
.9843	2.0472	.5906	.5906	S205FF
.9843	2.0472	.8125	.8125	5205KSS
.9875	2.4407	.7087	.8750	206RTQ
1.0000	2.0472	1.3390	.7090	ER16
1.1258	2.4409	.9449	.6299	206GGB
1.1258	2.6772	.9449	.7087	206GGCE
1.1811	2.4409	.6299	.6299	S206FF
1.3750	3.0940	1.6890	.9370	ER22
1.3780	2.8346	.6693	.6693	S207FF
1.5748	2.6772	.5906	.5906	108FFL
1.5748	2.6772	.5906	.5906	108FFN
1.5748	3.1496	.7087	.7087	S208FF
1.6875	3.3465	1.0940	1.9370	ER27
1.7717	3.3465	.7480	.7480	S209FF
2.1880	4.7244	2.1870	1.1417	8445
2.3622	4.3307	.8661	.8661	1212AL4
2.5591	4.8107	.9055	.9055	1213B
2.9528	*5.2960	.8661	.8661	N1215LB
2.9528	5.1181	.8661	.8661	N1215LOB
4.7244	7.0866	1.1024	1.1024	124AL

*Overall O.D. w/Snap Ring.